


Datenblatt Typ 2615EN

T-Stück, geschweißt ausgehalst (gezogen/gepresst) mit aufgeschweißtem Stutzen

1.4404/316L • 1.4301/304 • Ausführung ähnl. DIN 2615 / EN 10253-3

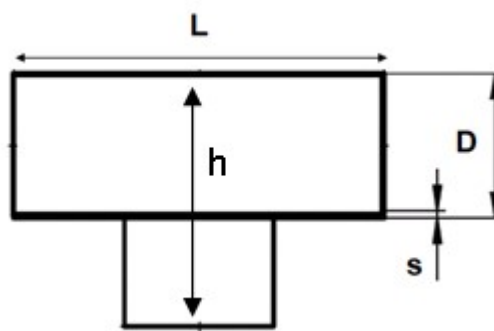

Abmessung [NW]	D [mm]	s [mm]	Baulänge [mm]	Höhe [mm]
10	17,20 mm	1,60 mm	65,0 mm	40,0 mm
15	21,30 mm	2,00 mm	65,0 mm	42,0 mm
32	42,40 mm	2,00 mm	95,0 mm	68,0 mm
40	48,30 mm	2,00 mm	114,0 mm	81,0 mm
50	54,00 mm	2,00 mm	121,0 mm	87,0 mm
50	60,30 mm	2,00 mm	135,0 mm	97,0 mm
65	70,00 mm	2,00 mm	148,0 mm	109,0 mm
80	88,90 mm	2,00 mm	168,0 mm	128,0 mm
100	104,00 mm	2,00 mm	190,0 mm	146,0 mm
100	108,00 mm	2,00 mm	200,0 mm	154,0 mm
100	114,30 mm	2,00 mm	210,0 mm	162,0 mm
125	139,70 mm	3,00 mm	250,0 mm	198,0 mm
200	206,00 mm	3,00 mm	358,0 mm	283,0 mm

Änderungen vorbehalten. Abbildungen ähnlich.